




Piccolameccanica

Cuscinetti Commerciali Rivestiti a Carrucola serie H

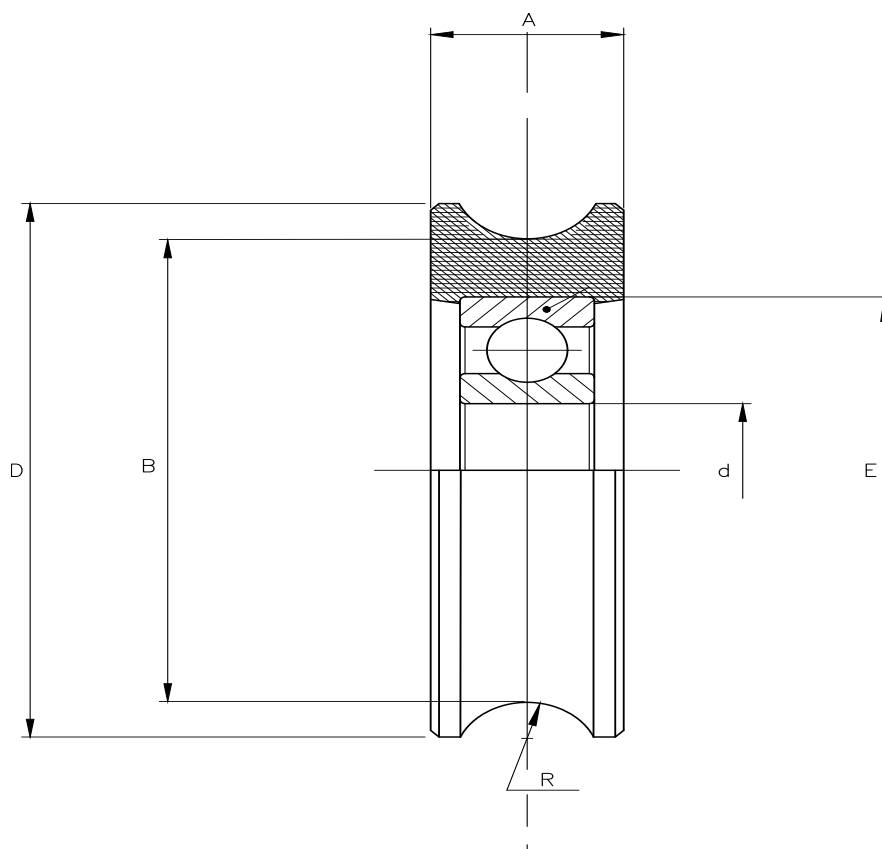

	Articolo	D	d	B	E	A	R	-	.	portata N
1	HUR5-6KBYC	21,5	4	18	13	6	1,5	-	-	200
2	HQ23-5NWHT	23	5	19,5	16	7,5	2,75	-	-	300
3	HQ25-5NFBT	25	5	19,5	16	7,5	3	-	-	300
4	HO30-LDMQK	30	6	24	19	10	3,1	-	-	400
5	HR31-8DSTC	31	8	26	22	8,4	2	-	-	450
6	HB34-F0ST0	34	8	30	22	8	3	-	-	450
7	HR37-7DTWE	37	8	33,1	22	7,5	2,5	-	-	450
8	HH40-MFTUC	40	10	34	26	10,5	-	-	-	500
9	HX45-MHWDC	45	12	39	28	10,5	3,2	-	-	500

quote in mm

CARATTERISTICHE TECNICHE

Cuscinetti commerciali: 624, 625, 626, 607, 608, 6000, 6001
Versione ZZ oppure 2 RS

Acciaio 100 Cr6 Bonificato
oppure
Acciaio Inox AISI 420

A richiesta, e per quantitativi da definire, si eseguono rivestimenti esterni con misure a disegno cliente