



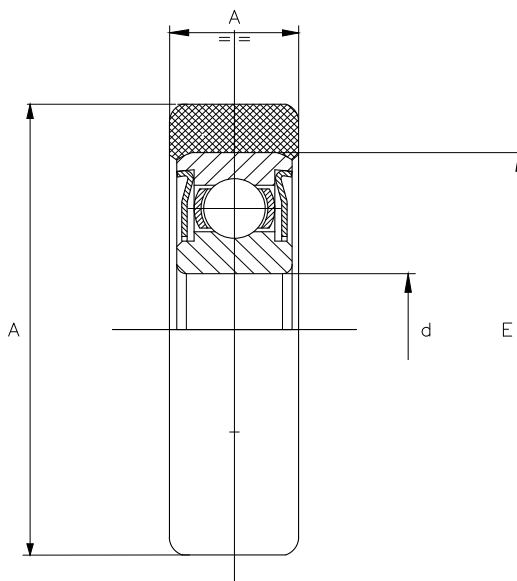

Piccolameccanica

Cuscinetti a sfere Commerciali Rivestiti serie Q

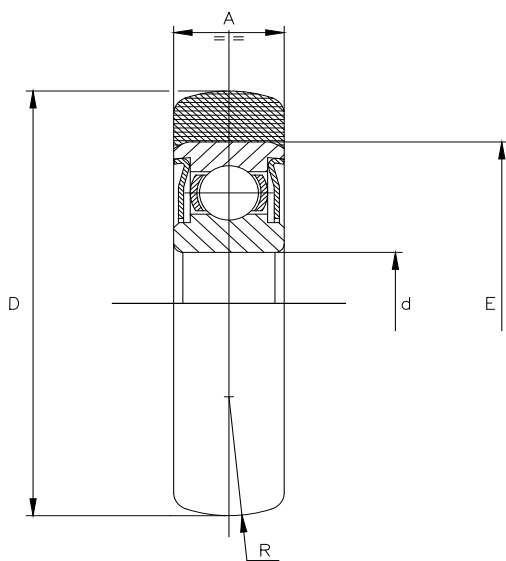

	Articolo	D	d	-	E	A	R	-	-	portata N
1	QLH3-B0BYT	18	4	-	13	6	-	-	-	200
2	QL21-B0BYT	19	4	-	13	6	-	-	-	200
3	QP22-7DBYC	22,5	6	-	19	7,8	-	-	-	300
4	QB25-6DORC	25	6	-	19	6	7	-	-	400
5	QB27-7DORX	27	6	-	19	7	5	-	-	400
6	QP27-7DSTC	27	6	-	19	7	-	-	-	400
7	QY27-7DOOM	27	6	-	19	7	7	-	-	400
8	QY30-7DOOC	30	6	-	19	7	7	-	-	450
9	QB30-LKSTC	30	8	-	22	10	30	-	-	450
10	QL30-F0ST0	30	8	-	22	8	-	-	-	450
11	QI34-MFTUC	34	10	-	26	10,5	-	-	-	500

quote in mm

CARATTERISTICHE TECNICHE

Cuscinetti commerciali: 624, 625, 626, 607,608, 6000,6001

Versione ZZ oppure 2 RS

Acciaio 100 Cr6 Bonificato

oppure

Acciaio Inox AISI 420

A richiesta, e per quantitativi da definire, si eseguono rivestimenti esterni con misure a disegno cliente